



NetLinx Module Interface Specification

for a

Hitachi

CP-D32WN Projector

Also works with CP-D25WN and CP-D27WN

TABLE OF CONTENTS

- Introduction3
- Overview3
- Implementation3
- Channels4
- Levels4
- Command Interface6
- String Feedback8
- Device Notes9
- Programming Notes9
- Adding Functions to Modules9
 - Commands to the device9
 - Additional Feedback from the device10

Revision History

Date	Initials	Comments
7-21-2014	DC	Initial release

Introduction


This is a reference manual to describe the interface provided between an AMX NetLinx system and a Hitachi CP-D32WN projector. The required communication settings are a baud rate of 19200, 8 data bits, 1 stop bit, no parity, and handshaking off.

Overview

The COMM module translates between the standard interface described below and the **CP-D32WN** serial protocol. It parses the buffer for responses from the CP-D32WN, sends strings to control the CP-D32WN, and receives commands from the UI module or telnet sessions.

A User Interface (UI) module is also provided. This module uses the standard interface described below and parses the string responses for feedback.

The following diagram gives a graphical view of the interface between the interface code and the NetLinx module.

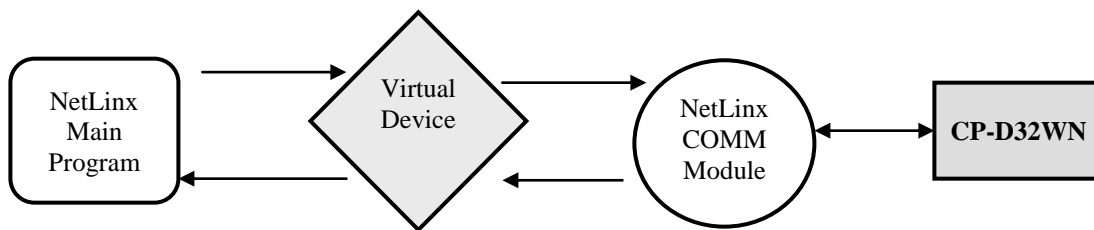

Implementation

To interface to the CP-D32WN module, the programmer must perform the following steps:

1. Define the device ID for the CP-D32WN that will be controlled.
2. Define the virtual device ID that the CP-D32WN COMM module will use to communicate with the main program and User Interface. NetLinx virtual devices start with device number 33001.
3. The NetLinx CP-D32WN module must be included in the program with a `DEFINE_MODULE` command. This command starts execution of the module and passes in the following key information: the device ID of the CP-D32WN to be controlled, and the virtual device ID for communicating to the main program.

An example of how to do this is shown below.

```

DEFINE_DEVICE
  dvCP-D32WN    = 5001:1:0    // The CP-D32WN connected to the NetLinx on 1st RS-232 port
OR
  dvCP-D32WN    = 0:3:0      // The CP-D32WN connected to the NetLinx via IP

  dvCP-D32WN TPI = 10001:1:0 // The touch panel used for output

  vdvCP-D32WN    = 33001:1:0 // The virtual device use for communication between the
                               // Comm module interface and User_Interface (UI) module interface

DEFINE_START    // Place define_module calls to the very end of the define_start section.
// Comm module
DEFINE_MODULE 'Hitachi_CP-D32WN_Comm' mdlCP-D32WN_APP(vdvCP-D32WN, dvCP-
D32WN)

```

Upon initialization the AMX Comm module will communicate with the Hitachi CP-D32WN and information will be exchanged.

Channels

The channels supported by the COMM module are listed below. These channels are associated with the virtual device(s) and are independent of the channels associated with the touch panel device.

Note: An ‘*’ indicates an extension to the standard API.

Channel	Description
251	This channel is used for feedback only. ON: Device is online. OFF: Device is offline.
255	This channel is used for feedback only. ON: POWER is ON. OFF: POWER is OFF

Levels

The Main Program controls the video projector via level events (NetLinx command *send_level*) sent to the COMM module. The levels supported by the COMM module are listed below. These levels are associated with the virtual device(s) and are independent of the levels associated with the touch panel device.

Level	Description
1	Lamp-Hours used

Command Interface

The UI module controls the CP-D32WN via command events (NetLinx command *send_command*) sent to the COMM module. The commands supported by the COMM module are listed below.

NOTE: AMX has not defined a standard API for CP-D32WN devices.

Command	Description
ADDRESS=<value>	Sets the IP address for the projector <value>: valid IP address ADDRESS=192.168.1.200
ASPECT=<value>	Sets the current aspect ratio. <value>: 1 = Normal (All modes) 2 = Wide (All modes) ASPECT=2: Turn aspect mode to Wide.
ASPECT?	Request for current aspect ratio. ASPECT?
AUTO=<value>	Auto-adjust PC image <value>: 1 = Execute Auto-Adjust
BLANK=<value>	Set the image blank state <value> : 0 OFF - Normal image is presented 1 ON - image is blank BLANK=1
BLANK?	Request the image blank state. BLANK?
DEBUG=<state>	Set the debug state <state> : 0 OFF 1 ON DEBUG=1
DEBUG?	Request the debug state. DEBUG?

INPUT=<value>	<p>Selects the input source.</p> <p><value> : 1 = HDMI 2 = RGB1 3 = RGB2 4 = VIDEO 5 = S-VIDEO 6 = COMPONENT</p> <p>INPUT=3</p>
INPUT?	<p>Request the current input setting.</p> <p>INPUT?</p>
PASSTHRU=<string>	<p>Allows user the capability of sending commands directly to the CP-D32WN without processing by the NetLinx module. User must be aware of the protocol implemented by the unit to use this command. This gives the user access to features which may not be directly supported by the module. See "Adding Functions to Modules" section at the end of this document for more information.</p> <p>The COMM module automatically adds the required checksum to the command string.</p> <p><string> : string to send to unit</p> <p>PASSTHRU=RVER</p>
POWER=<state>	<p>Sets the power state.</p> <p><state> : 0 = off 1 = on</p> <p>POWER=0</p>
POWER?	<p>Request the current power setting.</p> <p>POWER?</p>
REINIT=<value>	<p>Reinitialize communications with the projector</p> <p><value> : 1 = re-establish IP communication</p> <p>REINIT=1</p>
VERSION?	<p>Request the current version number of the NetLinx module.</p> <p>VERSION?</p>

Table 1 – Send Command Definitions

String Feedback

The NetLinx COMM module provides feedback to the User Interface module for **CP-D32WN** changes via string events. The strings supported are listed below.

String	Description
ASPECT=<value>	<p>Reports the current aspect ratio.</p> <p><value>: 1 = Normal (All modes) 2 = Wide (All modes)</p> <p>ASPECT=2:</p>
BLANK=<value>	<p>Reports the image blank state</p> <p><value> : 0 OFF - Normal image is presented 1 ON - image is blank</p> <p>BLANK=1</p>
INPUT=<value>	<p>Reports the input source.</p> <p><value> : 1 = HDMI 2 = RGB1 3 = RGB2 4 = VIDEO 5 = S-VIDEO 6 = COMPONENT</p> <p>INPUT=3</p>
LAMPTIME=<value>	<p>Reports lamp usage in hours. (Updated every 5 minutes). Also available as level 1.</p>
POWER=<value>	<p>Reports the power status.</p> <p><value> : 0 power is off 1 power is on 2 cooldown</p>
VERSION=<version>	<p>Reports the current version number of the NetLinx module.</p> <p><value> : current version number in xx.yy format</p> <p>VERSION=1.06</p>

Table 2 - String Feedback Definitions

Device Notes

Commands implemented by this interface include those that are commonly used and shared between various CP-D32WN devices. Several of the CP-D32WN commands have been omitted and may be executed using the PASSTHRU command.

A periodic poll will return the power state and the total number of hours used by the device. Should the CP-D32WN shift into sleep mode, it will be automatically shifted back into power-on mode.

Programming Notes

The COMM module imposes synchronous operation i.e. the COMM will not send a command to the CP-D32WN until it has gotten a response or a timeout from the previous command.

A queue is implemented so that the commands from can be stacked. Commands are pulled off the queue (1) when a reply is received or, (2) after the reply timer times out (200 milliseconds). The device is polled every 10 seconds to return the power state and the input selected.

The Request commands return the state that is currently stored in the COMM module. They do NOT send a new Request to the device. The COMM module states are updated either by the periodic poll or by the enforced feedback. When a state changes, the UI is automatically informed.

Adding Functions to Modules

Commands to the device

This module supplies a mechanism to allow additional device features to be added to software using the module. This is the PASSTHRU command, which allows protocol strings to be passed through the module. The device-specific protocol must be known in order to use this feature.

As an example, suppose that a module for a projector has not implemented the 'white balance adjustment' feature. The command that the projector protocol requires is 03H, 10H, 05H, 14H, followed by a checksum. The documentation for the PASSTHRU command specifies that the module will automatically generate the checksum. In this case, the following string should be sent from the UI code to implement 'white balance adjustment'.

```
send_command vdvDevice,"PASSTHRU=',$03,$10,$05,$14"
```

The reason to use PASSTHRU instead of sending a protocol string directly to the device port is that the device may require command queuing, calculation of checksums, or other internal processing, which would not be done if the string was sent directly. Because of this, it is best to filter all communication TO the device through the module. (The module documentation will indicate any processing that will be automatically done to the PASSTHRU string like checksum calculation.)

Additional Feedback from the device

The module documentation indicates what feedback is provided. If additional feedback is required, a `CREATE_BUFFER` for the device must be implemented in the user code to process the strings from the device manually. Note that the module will still be processing the response strings independently and sending the interpreted feedback up to the user code.